

Reference	SSM71952
Models	Defender / L316
Title	Defender 07MY onwards – Transmission Output Shaft TUD500020 Greasing
Category	Driveline
Last modified	18-Aug-2014 00:00:00
Symptom	505000 Manual Transmission Concerns
Attachments	Greasing TUD500020.pdf (Greasing TUD500020.pdf)

Content**Issue:**

Application of weicon grease required when the transmission output shaft is replaced.

Cause:


Advise that update to topix is required

Action:

If the transmission output shaft (part number TUD500020) is replaced in service on Defender vehicles from 2007MY onwards equipped with the MT82 6 speed manual transmission then weicon grease must be applied to the circumference of both the shaft and flange as shown in the attached document.

Weicon grease is available to order via Land Rover Parts, part number IYX500050.

Defender MT82 6 speed Transmission Extension shaft and Flange 2007MY onwards

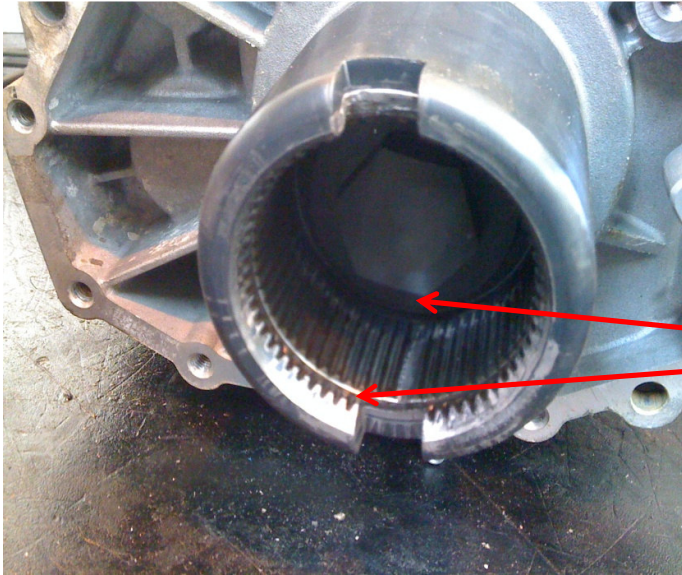

**Apply Weicon Grease
(part number IYX500050)
360 degrees between
the circlip and base of
the flange**



**Apply Weicon Grease
(part number
IYX500050) 360
degrees the entire
length of the splines.**